

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 9 TOWNSHIP 16 RANGE 5

DATE: 2-13-06

PARTY CHIEF: Wilcoxen

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 7-9-01

IN. S.P.C. E ZONE NAD '83

NAME: 16050904

N: 510727.5740(m)

E: 72209.3280(m)

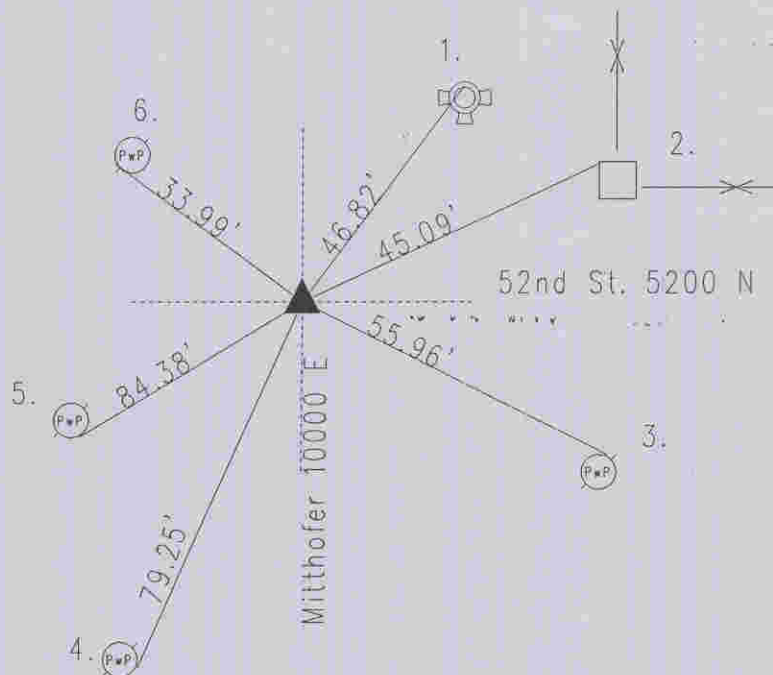

Original post set 1860 by Hosbrook. A rock set with witness: 30" oak S 75 E 73 links. 20" elm S 18 W 76 links. Fortner 3-7-75 called railroad spike. 5-14-90 excavated and found PK nail at surface. Railroad spike found 8" down. Stone found 15" down. Stone was .10' N and .10' E of railroad spike. Harrison set. Re-tied 9-23-96. Re-tied 7-9-01 by Whiteside. Re-tied 2-13-06.

16050904

REF.	DISTANCE	DESCRIPTION
1.	46.82'	Top nut of fire hydrant
2.	45.09'	NW corner of plastic corner fence post
3.	55.96'	Small PK nail NE PwP#207-381 12"up
4.	79.25'	Mag nail w/bw SE PwP#542-381BA 5"up
5.	84.38'	Mag nail w/bw SE PwP#541-381BA 3"up
6.	33.99'	Small PK nail SW PwP#394-357B 6"up